

Class 150 Carbon Steel Flanged Ball Valves

Split-Body, Full-Bore Design • Blowout-Proof Stem • 316 SS Trim •
Multiple V-Ring Packing • Mounting Pad • Fire Safe • Vented Ball

285 PSI/19.7 Bar Non-Shock Cold Working Pressure ◆

CONFORMS TO ASME/ANSI B16.34, B16.5, MSS SP 72,
API 607 FOURTH EDITION, API 608, API 598,
MSS SP 25



F-515-CS-F-66-FS

Carbon x Stainless
Flanged


MATERIAL LIST

PART	SPECIFICATION
1. ¹ Body and End Piece	Carbon Steel ASTM A 216 Type WCB
2. ¹ Ball (Vented)	Stainless Steel ASTM A 351 Type CF8M
3. Stem	Stainless Steel ASTM A 276 Type 316
4. Seat	Carbon Filled PTFE
5. Packing Set	Graphite and Braided Graphite
6. Pack Gland	Carbon Steel Plated
7. Gasket	304 SS/Graphite Spiral Wound
8. Body Stud	Carbon Steel A 193 Grade B7M
9. Heavy Hex Body Nut	Carbon Steel A 194 Grade 2HM
10. Belleville Washer	Stainless Steel



¹Cast specifications shown. Smaller sizes may be manufactured from equivalent bar stock specifications.

DIMENSIONS—WEIGHTS—QUANTITIES


Size	Dimensions										
	A	B	C	D	E						
In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In.	mm.	In.	mm.	In.	mm.
1/2	15 4.25	108 2.52	64 .44	11 3.50	89 .59	15					
3/4	20 4.63	118 2.74	70 .50	13 3.88	99 .78	20					
1	25 5.00	127 2.80	71 .56	14 4.25	109 .98	25					
1 1/2	40 6.50	165 3.54	90 .56	14 5.00	127 1.57	40					
2	50 7.00	178 3.99	101 .62	16 6.00	152 2.00	51					
3	80 8.00	203 4.19	106 .75	19 7.50	190 3.00	76					
4	100 9.00	229 4.50	114 .94	24 9.00	229 4.00	102					
6	150 15.50	394 8.00	203 1.00	25 11.00	279 6.00	152					
8	200 18.00	457 9.00	229 1.12	28 13.50	343 8.00	203					
10	250 21.00	533 10.50	267 1.19	30 16.00	406 10.08	256					
12	300 24.00	670 12.00	305 1.25	32 19.00	483 12.09	307					



1/2"-8"

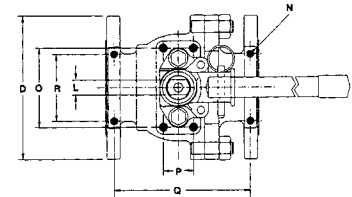

10"-12"



Size	Dimensions												F-515-CS-F-66-FS			
	G	H	J	K	L	N	O	*P	Q	R	Lbs.	Kg.				
In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.						
1/2	15 5.12	130 3.52	89 .47	12 1.00	25 .19	5 .250-20	—	—	—	—	3.75	95	2.00	51	4.00	1.82
3/4	20 6.10	155 4.13	105 .69	18 1.26	32 .31	8 .250-20	—	—	—	—	3.94	100	2.00	51	6.00	2.72
1	25 6.10	155 4.25	109 .63	17 1.26	32 .31	8 .312-18	—	—	—	—	4.19	105	1.75	44	8.00	3.64
1 1/2	40 9.06	230 4.97	126 1.50	38 1.68	43 .47	12 .312-18	—	—	—	—	5.63	143	1.75	44	17.00	7.73
2	50 9.03	230 5.66	144 1.81	46 1.66	42 .63	16 .312-18	—	—	—	—	6.32	161	2.25	57	26.00	11.82
3	80 12.63	321 7.38	187 2.65	67 2.13	54 .78	20 .375-16	4.13	105 1.57	40 7.12	181 3.50	89 49.00	22.27				
4	100 15.75	400 8.09	205 2.59	66 2.13	54 .78	20 .437-14	4.13	105 1.57	40 8.00	203 4.00	102 75.00	34.09				
6	150 31.50	800 10.65	271 3.68	93 2.58	66 1.10	28 .437-14	4.96	126 2.36	60 14.44	427 4.00	102 171.00	77.73				
8	200 —	—	—	4.53	115 2.53	65 1.17	30 .500-13	4.96	126 2.36	60 16.81	427 7.62	104 322.00	146.36			
10	250 —	—	—	5.83	148 3.01	76 1.57	40 .625-11	5.90	150 2.75	70 19.75	502 8.66	220 483.00	219.55			
12	300 —	—	—	5.69	145 3.01	76 1.57	40 .625-11	5.90	150 2.75	70 22.69	576 9.45	240 659.00	298.55			

*Not drilled and tapped on 1/2"-2".

Note: Valves are static grounded by thrust washer.

◆ For detailed Operating Pressure, refer to Pressure Temperature Chart on page 81.